

URRACO 75

The Two Shaft Shredder

MATURE – SUPERIOR –

URRACO



THE URRACO 75

THE TWO SHAFT SHREDDER FOR ALMOST ANY MATERIAL

This is what LINDNER MOBILE SHREDDER stands for:

- Mature machinery concept
- High quality and durability due to first-class brand name components
- Innovative engineering and control technology
- Modular design for your individual requirements
- Continuous optimization and development of shredding shafts

The advantages of the Urraco 75

- Aggressive intake
- High throughput capacity of up to 60 tons per hour at low energy consumption
- High tolerance of foreign objects
- Low cost for wear and tear due to high durability and high quality components
- Service- and maintenance-friendly
- Low dust formation
- Fracture protection by reversing function
- High operational efficiency
- Multi-purpose applicability
- High shredding quality
- Defined output sizes due to adaptable shaft configurations
- Efficient energy stop for saving diesel fuel
- Effective cooling system



WOOD WASTE A1 – A4

Demolition wood, pallets, chipboard, cable drums, railway sleepers



BIOMASS

Green waste, rootstock, log wood, palms, animal manure, silo bales, grass cuttings



WASTE

Domestic waste, organic waste, plastics, PVC





COMMERCIAL WASTE

Bulky waste, C&D waste,
paper rolls, tar boards,
mixed construction waste



METAL- & LIGHT SCRAP

electric and electronic scrap,
alu scrap and alu housings



TIRES

Passenger car-, truck-
and tractor-tires



Discharge Conveyor

The frame of the discharge conveyor is made of a galvanized steel construction, hydraulically height adjustable and impresses with a strong belt drive.

Over-belt magnet

The powerful magnet with Extended magnetic core ensures a very high degree of Fe-Separation. The effective range is hydraulically adjustable.

LINDNER Shredding Shafts are impressive

The innovative and unique cutting geometry, the extra strong design and the rolling cutting process provide:


- Aggressive material intake
- High throughput capacity
- Fine and uniform final grain size
- Lower energy consumption
- Low cost for wear and tear

Wheel Axle

Simple moving of the machine on site.

PowerLine Edition

30% more power and performance due to reinforced hydraulic system and enhanced gearbox with increased torque.

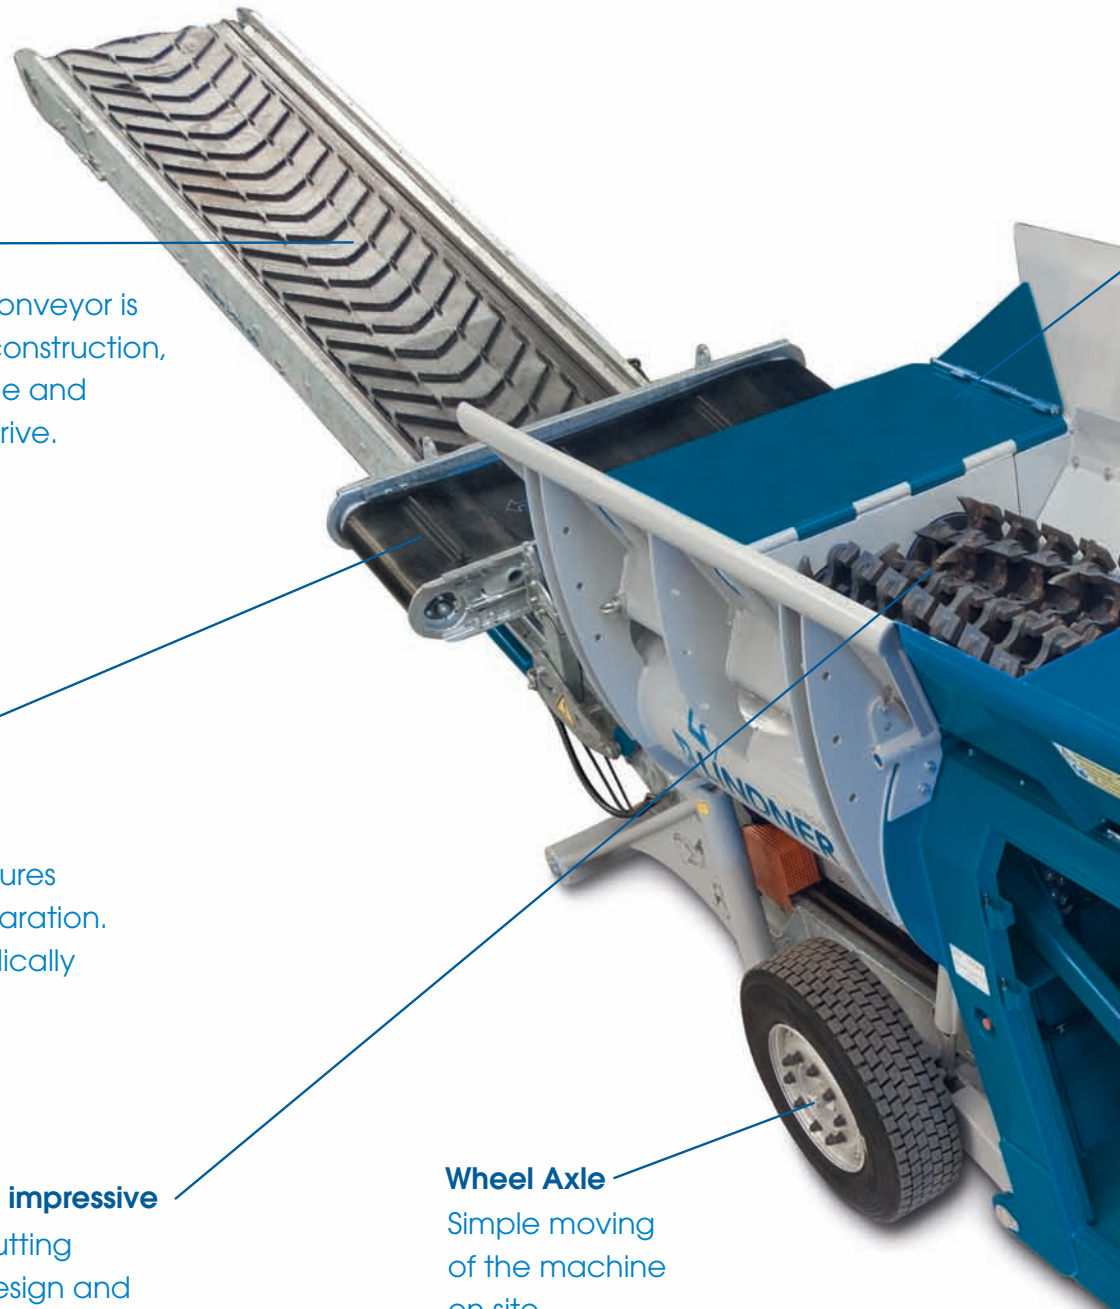


Two Tilting Hoppers

Very high tilt angles up to 80° haul to press the material to the shredding shafts for optimized feeding.




Touch-Screen-Display with Remote Control

Modern control technology for handling, controls and monitoring of all functions. The machine can be operated simply with a 10-channel remote control from the loading machine

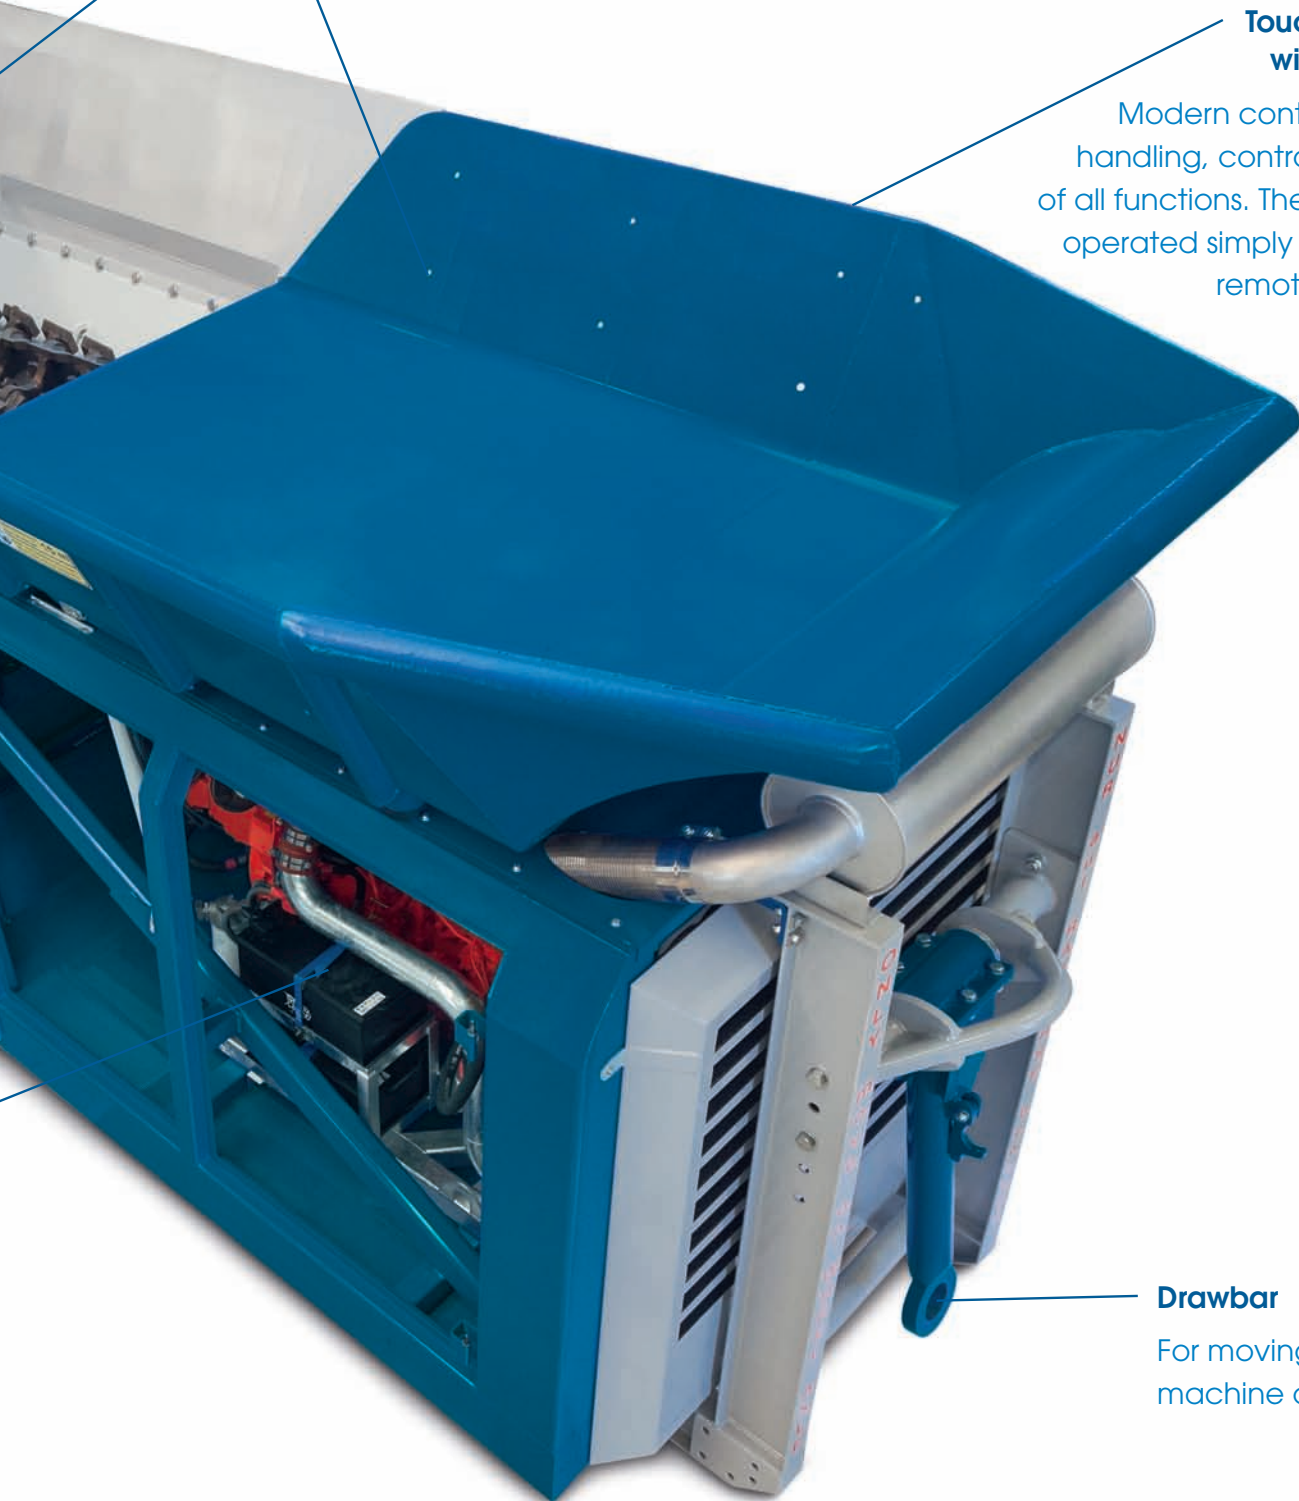

Drawbar

For moving the machine on site.

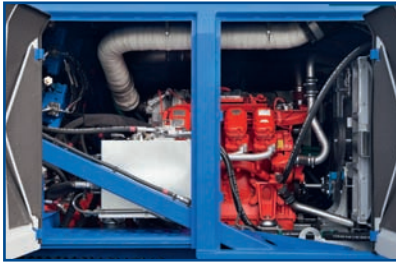

Diesel Drive (D)

Powerful and economic standard engine, mounted on hook lift, for all medium and heavy primary shredding operations.

Scan QR-Code to see the URRACO Diesel in action.



Diesel Track System (DK)

Mounted on track system for deployment in rough terrain and controlled with 21-channel remote control.

Scan QR-Code to see the URRACO Diesel Track System in action.



Electric Drive (E)

Model for stationary operations in workshops and central locations, for more economy and environment-friendly applications.

Scan QR-Code to see the URRACO Electric Drive in action.



Further options



Environment-friendly Diesel engine with up-to-date emission standard 4/Tier F and 3B/Tier 4i. Low fuel consumption, low noise and energy-saving.



Special shafts for special applications



Over-belt magnet



Special colors



Water sprinkler system for dust collection



Wheel axle with drawbar



After-cutting comb



LW-Shafts

The specialist for the fine grain

Wood waste A1 – A2

Biomass

Green waste

Logs

Rootstock

Domestic waste

Tires

Paper rolls

Tar board

Plastics



HW-Shafts

The specialist for the rough stuff

Wood waste A1 – A4

Rootstock

Domestic waste

Bulky waste

C & D waste

FE Light scrap

Alu Light scrap

Electronic scrap

Railway sleepers

Cable drums



Final grain: approx. 150mm – 200mm
4-fold fracture- and cutting-process
in one shaft rotation



Final grain: approx. 200mm – 500mm
Single fracture- and cutting-process
in one shaft rotation

www.l-ms.de

The ART of innovative SHREDDING!

The Two Shaft Shredder

URRACO 75

The most powerful two shaft shredder in its class.
The ideal primary shredder for almost any material.
The Urraco impresses with the aggressive intake,
robust construction, quality, cost effectiveness,
service-friendliness, performance and durability.




Lindner Mobile Shredders URRACO 75 is universally applicable in any mobile, semi-mobile and stationary sector.

TECHNICAL DATA	URRACO 75 D/E	URRACO 75 D/E <i>PowerLine</i>
Drive power diesel	350 PS	350 PS
Drive power electric	250 kW	250 kW
Shredding shaft length	1750 mm	1750 mm
Shredding shaft diameter	650 mm	650 mm
Weight machine	17 t	17 t
Weight magnet	1 t	1 t
Weight track system	4 t	4 t
Dimensions (L x B x H)	7,0m x 2,5m x 2,7m	7,0m x 2,5m x 2,7m

CAPACITY AT*	URRACO 75 D/E	URRACO 75 D/E <i>PowerLine</i>
Wood waste	up to 45 t/h	up to 60 t/h
Domestic waste	up to 50 t/h	up to 65 t/h
Bulky and C & D waste	up to 25 t/h	up to 40 t/h
Biomass	up to 150 m³/h	up to 200 m³/h

* Standard data and throughput capacities may vary depending on tools, feeding, specific weights and densities as well as properties of material.

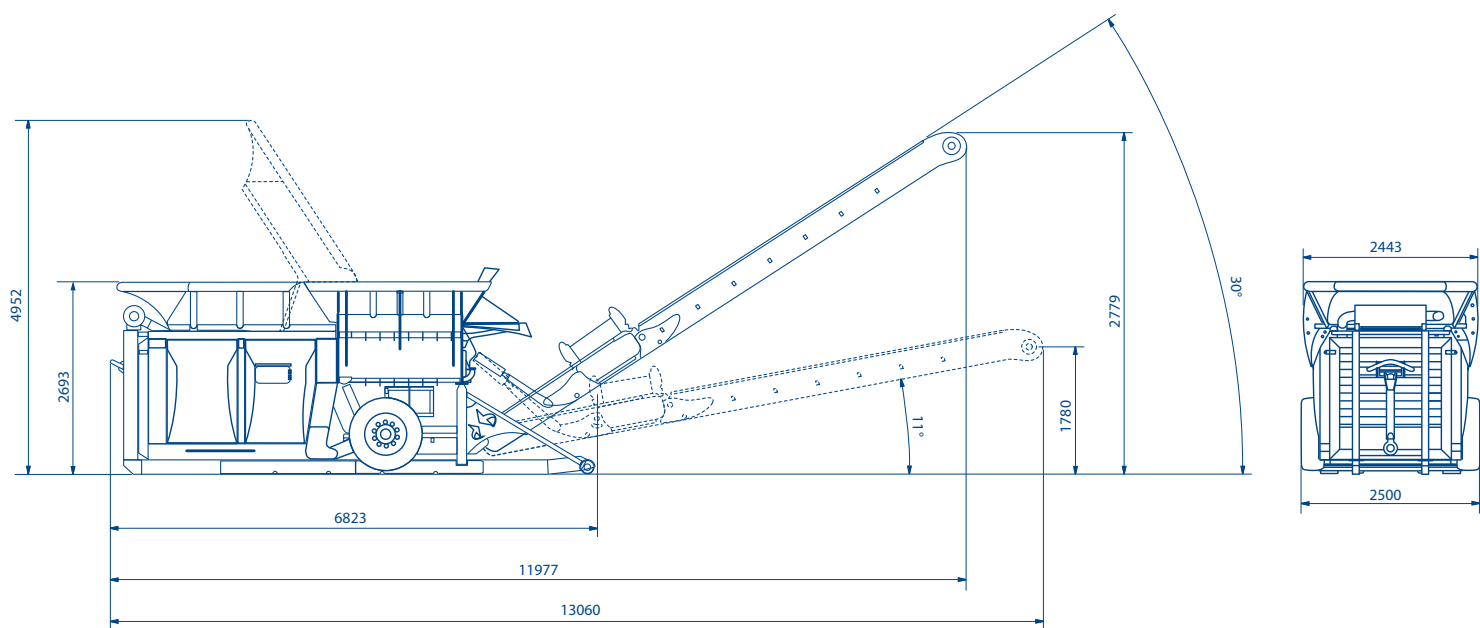

Update: May 2014. Technical changes, misprints and errors reserved. All images are sample pictures. All specifications are approximate.